



### GPO VT25 triode

This valve measures 120x55mm overall and has a BC4 base.




This is based on the LS5.

Filament voltage	4.5V
Filament current	850mA
Max anode voltage	200V
Amplification factor *	6.0
Mutual conductance *	2.0mA/V
Capacitances	
Cag max	6.0pF
Cae max	6.0pF
Cge max	6.0pF

\*: At Va=150, Vg=-9

Pin	Function
1	Grid
2	Filament -ve
3	Filament +ve
4	Anode

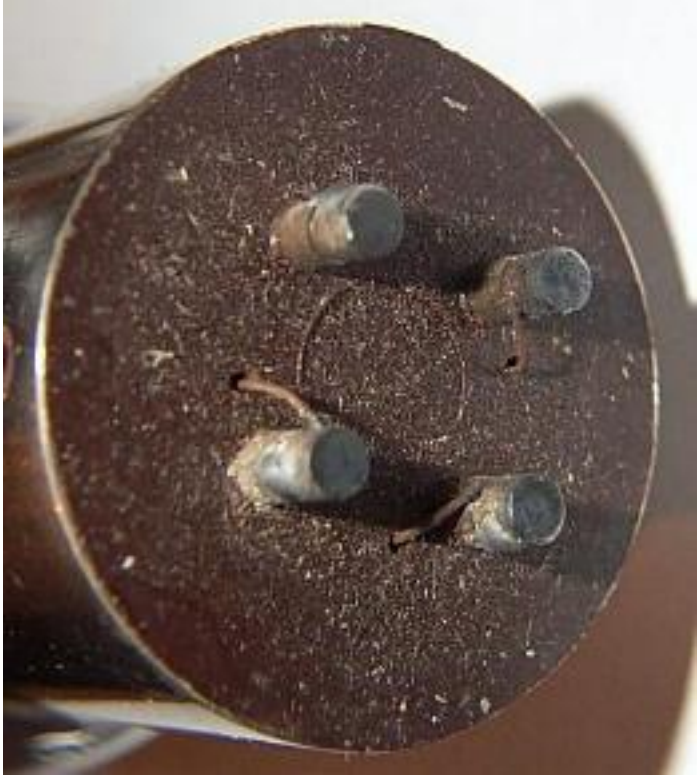

This file was last modified 15:45:17, Tuesday September 02, 2014